

Start eco Spikelight IP67

START eco Spikelight IP67 360lm 830 MB BLK
0053755



Product features

- Exterior LED spotlight suitable for wall or ground (spike) mounting. Complete with a 1M cable and an IP rated connector, Black aluminium - RAL9005, 360lm, 5W, 72lm/W, 3000K, Beam angle 20°, Driver Current: 200mA, CRI:80+, 220-240V, IP67, IK08, 30.000 hrs (L70:B50), (HxWxD) 255x70x110mm, Class 1, Energy class: A++, A+, A



NOTES

undefined

PRODUCT OVERVIEW

Product name	START eco Spikelight IP67 360lm 830 MB BLK
Technology	LED
Housing	Aluminium
Environment	External
General application	Residential & Consumer
ETIM Class	EC001744
E-number FI	4579449
Warranty	3 years
Fixture luminous flux (lm)	360
Luminaire efficacy (lm/W)	72
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	20
Photobiological Risk Group	RG1
Total power consumption (W)	5.0
Electrical protection	Class I
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9005 - Jet black
IP rating	IP67
IK rating	IK08
Product EAN number	5410288537559
Light source included	SAX0000A_0000

Start eco Spikelight IP67

START eco Spikelight IP67 360lm 830 MB BLK
0053755

DATA TABLE

General data

Product name	START eco Spikelight IP67 360lm 830 MB BLK
Technology	LED
Housing	Aluminium
Environment	External
General application	Residential & Consumer
Operating temperature range (°C)	-20°C - 40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
E-number FI	4579449
Warranty	3 years

Optical data

Fixture luminous flux (lm)	360
Luminaire efficacy (lm/W)	72
Colour temperature (K)	3000
Colour Code	830
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	20
Distribution type	Symmetric
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	5.0
Current (A)	0.04
Mains voltage (V)	220-240V~
Lamp power factor	0.54
Electrical protection	Class I
Dimmable	No
Drive current (mA)	200
Inrush Current (A)	10
Inrush Duration (µs)	200
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	80
Max. Luminaires per 13A C Breaker	115
Max. Luminaires per 16A C Breaker	125
Max. Luminaires per 20A C Breaker	160

Lifetime data

Lifespan L70 B50	30000
------------------	-------

Start eco Spikelight IP67

START eco Spikelight IP67 360lm 830 MB BLK
0053755

Physical data

Housing colour	RAL 9005 - Jet black
IP rating	IP67
IK rating	IK08
Diffuser finish	Transparent
Diffuser material	Glass
Nominal Product Length (mm)	110
Nominal Product Width (mm)	70
Nominal Product Height (mm)	255
Nominal Product Diameter (mm)	70
Weight (kg)	0.5


Packaging

Single packaging type	Carton
Product EAN number	5410288537559
Packaging single length / height (cm)	29.5
Packaging single width (cm)	8.0
Packaging single depth (cm)	8.0
DUN14 (outer)	15410288537556
Units per outer package	12
Packaging outer length / height (cm)	34.0
Packaging outer width (cm)	26.0
Packaging outer depth (cm)	31.0

Safety data

Optimal operating condition (°C)	-20-40
----------------------------------	--------

PHOTOMETRY

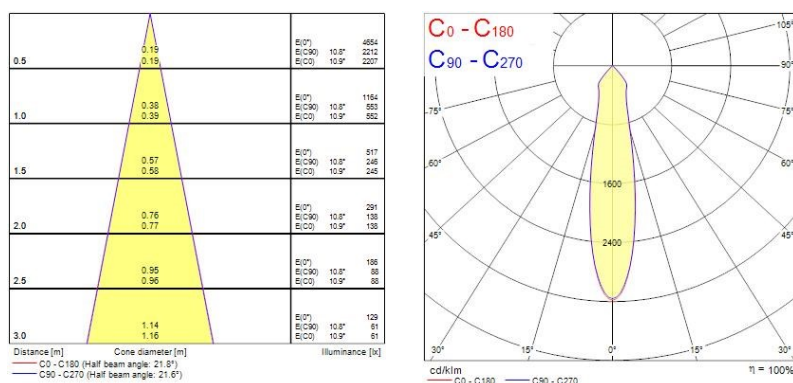

TECHNICAL DRAWINGS

Start eco Spikelight IP67

START eco Spikelight IP67 360lm 830 MB BLK
0053755

